


CONCRETE CURB, ITEM 609.04 M  
GRANITE CURB, ITEM 609.02 M

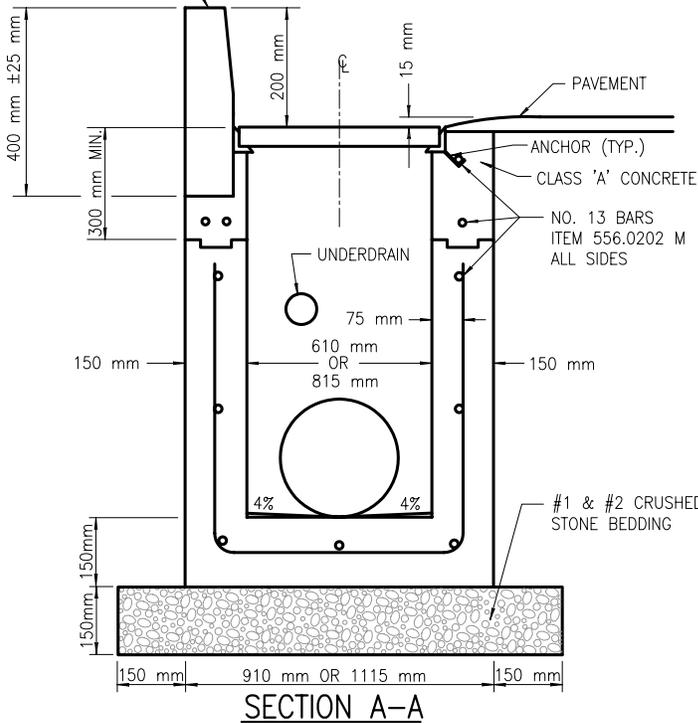

NOTES:

- ITEM 655.0201 M FRAME & GRATE- FRAME 735 mm x 953 mm  
GRATE 703 mm x 927 mm RETICULINE FRAME & GRATE  
ASSEMBLY TYPE NO. 11, SEE N.Y.S.D.O.T. METRIC STANDARD SHEETS  
M655-10R2 AND M655-11R1.  
PAYMENT AREA = 0.700 SQ. METERS.
- REINFORCEMENT SHALL HAVE A COVER OF 50 mm UNLESS  
OTHERWISE SHOWN. THE COST OF ALL BAR REINFORCEMENT  
SHALL BE INCLUDED IN THE PRICE BID FOR DROP INLETS.  
ALL BAR REINFORCEMENT IN THE PRE CAST STRUCTURE  
SHALL BE ACCORDING TO NYSDOT METRIC STANDARD SHEET M604-5.
- INSIDE DIMENSIONS OF PRECAST UNITS SHALL  
BE 610 mm x 815 mm.
- FILL WITH CEMENT MORTAR AND SEAL WITH ASPHALT  
EMULSION TACK COAT BETWEEN FRAME AND CURB. PAYMENT  
SHALL BE INCLUDED IN APPROPRIATE CURB ITEM.
- THE INTERIOR SIDES AND EXTERIOR BOTTOM AND SIDES OF ALL  
DROP INLET TO BE COATED WITH TWO COATS OF KOPPERS  
SUPER SERVICE BLACK OR APPROVED EQUAL.
- ALL PIPE CONNECTIONS TO STRUCTURE SHALL BE SEALED  
WITH 100% MORTAR.
- CLASS "A" CONCRETE BENCHES SHALL BE  
CAST- IN-PLACE ON ALL STORM DROP INLETS  
REGARDLESS OF PIPE DIAMETER.  
COST TO BE INCLUDED IN DROP INLET ITEM.
- REFER TO FRAME AND GRATE ANCHOR DETAIL.
- STEPS WILL NOT BE ALLOWED.

DROP INLET TYPE "S" PRECAST AGAINST CURB

NOT TO SCALE

11/16/04

REVISED