



Department of Transportation

Monroe County, New York

Adam J. Bello
County Executive

Thomas J. Frys, P.E.
Director

January 08, 2025

Dear Neighbor:

Monroe County plans to replace the existing culvert carrying **Boughton Hill Road over Irondequoit Creek Tributary** in 2026. This culvert is approximately 600 feet west of Mendon Ionia Road (NYS Rt. 64).

The existing culvert was originally constructed in 1912 and extended in 1935. The culvert has been inspected regularly and is in poor condition. It has been deemed by the Department of Transportation to be near the end of its useful life. The culvert is proposed to be replaced with a polymer coated pipe arch culvert.

Construction is scheduled to begin in the spring of 2026. During that time, Boughton Hill Road will be closed to vehicular and pedestrian traffic at the culvert site. Detours will be posted around the closure utilizing West Bloomfield Road, Cheese Factory Road, and Mendon Ionia Road (NYS Rt. 64).

The project is estimated to take approximately 3 months to complete. Additional information will be sent out at least 2 weeks before the planned road closure in the spring of 2026.

Please find enclosed with this letter an information sheet describing the project and the detour route. It also contains a link (with QR code) to submit comments or questions through an online form. Comments or questions may also be submitted by email or phone at the contact information below.

If you have any questions regarding the project, please contact me at 585-753-7733, samuelgiovino@monroecounty.gov, or by responding to the online form no later than February 7th, 2025.

Sincerely,

Samuel Giovino
Transportation Project Manager

ENCLOSURE

cc: Thomas Frys, Director of Transportation, Monroe County DOT
Henry Herdzik, Head of Highway and Bridge Engineering, Monroe County DOT
Steve Barz, Communications & Special Events, Monroe County
Hon. Richard B. Milne, Monroe County Legislator, 5th District
Adrienne Green, Senior Policy Advisor, Monroe County Executive's Office
Hon. John D. Moffitt, Supervisor, Town of Mendon
Andrew Caschetta, Highway Superintendent, Town of Mendon

50 West Main Street • Suite 6100 City Place Building • Rochester, New York 14614-1231
(585) 753-7720 • fax: (585) 753-7730 • www.monroecounty.gov • email: mcdot@monroecounty.gov

Monroe County Department of Transportation

Presents

Replacement of Boughton Hill Road Culvert over Irondequoit Creek Tributary



Town of Mendon, Monroe County

Project Description:

Due to its age and condition, the project proposes to replace the culvert that carries Boughton Hill Road over Irondequoit Creek Tributary in the Town of Mendon. The project is located approximately 600 feet west of Mendon Ionia Road.

Existing Culvert:

- 5-ft. by 5-ft. opening.
- Originally constructed in 1912.
- Culvert was extended in 1935.
- Cast-in-place concrete three-sided culvert


Project Objective:

Address structural and hydraulic deficiencies to meet current standards. Also, to maintain safe access over the waterway by providing a structurally sound culvert and widened shoulders.

Proposed Alternative: Culvert Replacement

The proposed alternative includes the following features:

- Complete removal of the existing culvert.
- Installation of a new 9'-4" span x 6'-3" rise polymer coated pipe arch culvert approximately 68-ft long.
- Maintain existing horizontal and vertical alignment.
- Installation of pipe arch endsections.
- Widen the shoulders of the road over the culvert to 6 feet.
- Construction of drainage improvements near the culvert.
- Water main relocation around northern end of culvert

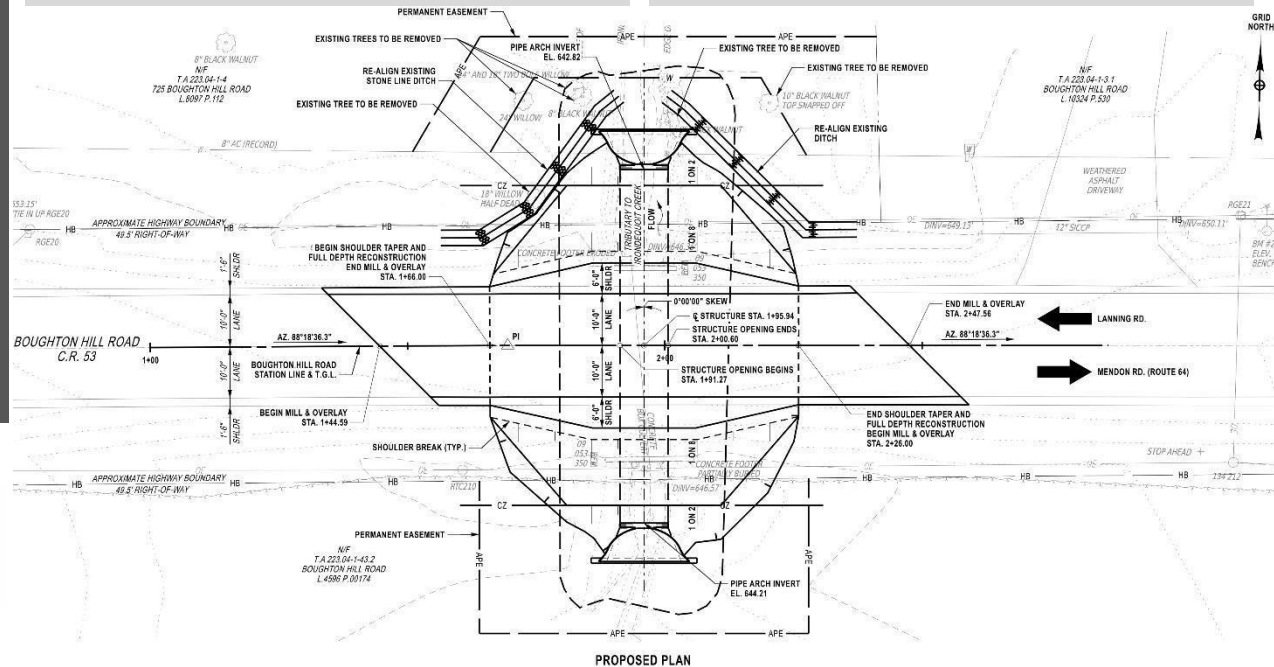

Maintenance & Protection of Traffic:

- The project will require closure of Boughton Hill Road at the project limits. A detour will be posted for through traffic, but the road will be open to local traffic up to the culvert. The culvert will not be crossable. The posted detour utilizes West Bloomfield Road, Cheese Factory Road and Mendon Ionia Road.

DETOUR ROUTE MAP



Schedule:

- Preliminary Design – Ongoing
- Final Design – Completion in Winter 2024
- ROW Acquisition – Summer of 2025
- Construction Bidding – Winter of 2025
- Construction – 2026 (Expected 3-month duration)

Funding:

The project is being solely funded by the Bridge New York Program.

Right of Way:

- The acquisition of two permanent easements surrounding the proposed culvert pipe ends is anticipated.
- The easements will be needed for construction of the culvert and for future maintenance of the culvert.
- Affected property owners will be contacted during final design.

Comments, Questions & Concerns:

Comments or questions may be submitted online through the survey link below or by scanning the QR code. In addition, you can contact the Monroe County Project Manager, Samuel Giovino, by phone or email at the contacts below. Please use "Boughton Hill Culvert" as the subject for emails.



<https://forms.gle/5LmD8wUNYjvovVMu7>

Samuel Giovino

Monroe County Department of Transportation
Transportation Project Manager
Phone: (585) 753-7733
Email: samuelgiovino@monroecounty.gov

Additional Information:

For additional information, visit the County's website at:

<https://www.monroecounty.gov/dot-construction>

