

Department of Transportation

Monroe County, New York

Adam J. Bello
County Executive

Thomas J. Frys
Director

April 23, 2025

Re: YOU ARE INVITED TO THE PUBLIC OPEN HOUSE FOR THE

BAY ROAD MILLING & RESURFACING PROJECT

WEDNESDAY, MAY 14, 2025

4:00 PM-6:00PM

COMMUNITY ROOM - WEBSTER PUBLIC LIBRARY

980 RIDGE ROAD, WEBSTER, NY 14580

Dear Neighbor:

Monroe County is planning to perform roadway improvements on Bay Road between NY-104 and Lake Road (CR-1) in the Town of Webster. This project is necessary to improve the condition of the roadway pavement and to rehabilitate deteriorated storm sewer facilities. As part of these improvements, Bay Road will be re-striped in order to reduce the number of travel lanes and add a center turning lane and wider shoulders. The center turn lane will better accommodate vehicles making left turns, and the wider shoulders will better accommodate bicycle and pedestrian traffic along this corridor.

We will be holding an open-house style public meeting to discuss the project, answer questions, and seek input from the public on **Wednesday, May 14, 2025.** The open house will take place between 4:00pm-6:00pm; you are welcome to stop by at any point during that time. In advance of the meeting, please review the enclosed project information sheet. Additional information, including preliminary plans for the entire roadway, can be found on the Monroe County DOT website: https://www.monroecounty.gov/dot-construction.

Construction for this project is scheduled to begin in the spring of 2026 and should be completed in the fall of the same year. A notice will be mailed out approximately 2 weeks before the start of the project. During construction, please expect some delays in traffic around work zones during work hours.

If you have any comments or questions regarding the project, please contact me by phone at 585-753-7731 or by e-mail at davidkubiak@monroecounty.gov. Please provide all comments no later than June 14, 2025.

Sincerely,

David Kubiak, P.E.

Transportation Project Manager



BAY ROAD MILLING & RESURFACING PROJECT

NYS ROUTE-104 TO LAKE ROAD TOWN OF WEBSTER, MONROE COUNTY, NEW YORK

PROJECT GOALS

Improve pavement surface condition by milling & re-paving travel lanes and shoulders

Re-stripe roadway to reduce the number of travel lanes and add a center turning lane and wider shoulders

Rehabilitate storm sewer system

Replace curbing that is damaged or low

Adjust drainage grates, manhole covers, and valve covers to proper grade, as needed

MORE INFORMATION ON THIS PROJECT, AND OTHER MONROE COUNTY DOT PROJECTS, IS AVAILABLE ON OUR WEBSITE: https://www.monroecounty.gov/dotconstruction

Project Location Project Location Nam Rd Na

Project Limits

• Bay Road from NYS Route-104 to Lake Road.

Proposed Improvements

- The existing storm sewer system will be rehabilitated using cured-in-place pipe lining.
- Damaged and low curbs will be removed and replaced.
- If replacement curb is across a driveway opening, the first 2'+/- of asphalt behind the curb will be replaced.
- Existing pavement surface on Bay Road will be milled to a depth of 2". Deeper pavement repairs will be completed, as needed, and the entire surface will be re-paved with 2" of new asphalt.

Reduction of Travel Lanes ("Road Diet")

- The current lane configuration on Bay Road is two lanes northbound and two lanes southbound.
- This project proposes to implement a "Road Diet" beginning 350' north of Route 104 and extending to Lake Road. This will reduce travel lanes to a single lane northbound (11'), a single lane southbound (11'), a new center two-way left turn lane (11'), and wider shoulders (7'+/-).
- Refer to the back of this sheet for a detail comparing the existing and the proposed lane configuration.
- There will be no change to the overall curb-to-curb width of the roadway.

Misc Notes

- Manhole covers, drainage grates, and valve covers will be adjusted to proper grade prior to paving.
- All work will be completed within the existing Monroe County Right-of-Way.

Work Zone Traffic Control

- Single lane closures and travel lane shifts (maintaining two way traffic) to be utilized for most work
- Alternating one-way traffic, with flagger control is not anticipated to be needed.
- Access to all properties will be maintained throughout construction.

Tentative Schedule

Begin Construction: Spring 2026

• Complete Construction: Fall 2026

If you have any questions or would like additional information, please contact Monroe County DOT's Project Manager:

David M. Kubiak, PE

50 West Main Street


CityPlace, Suite 6100

Rochester, NY 14614


Telephone: 585-753-7731

Email: davidkubiak@monroecounty.gov

EXISTING BAY ROAD LANE LAYOUT

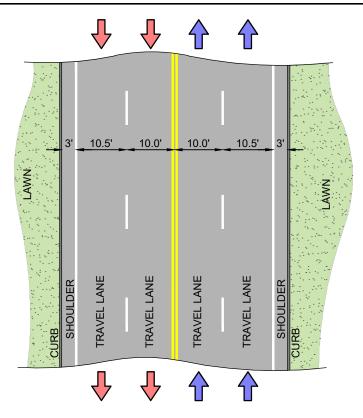

PROPOSED BAY ROAD LANE LAYOUT

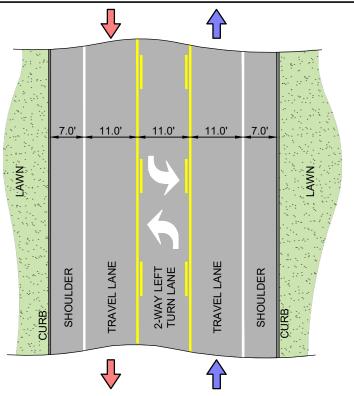

COPYRIGHT © 2025 MARATHON ENG.



BAY ROAD MILLING & RESURFACING PROJECT NYS ROUTE-104 TO LAKE ROAD