

**MONROE COUNTY  
DEPARTMENT OF TRANSPORTATION  
WELCOMES YOU TO A PUBLIC INFORMATION MEETING**  
*For*

**English Road Culverts Located 600 feet East of  
Long Pond Road and at Old English Drive**

**IN THE TOWN OF GREECE  
THURSDAY, FEBRUARY 27, 2020**



This meeting is being held to allow interested parties to review the project plans in an informal setting, comment, and ask questions of the Monroe County Department of Transportation Officials and T.Y. Lin International. There will be a short presentation followed by a period for additional questions and comments.

The schedule for the evening is as follows:  
Short Presentation 7:00 – 7:30 PM  
Questions Immediately Following Presentation



**TYLIN**INTERNATIONAL



CULVERT LOCATIONS

PROPOSED DETOUR ROUTE

PROPOSED DETOUR  
ENGLISH ROAD OVER ROUND  
POND CREEK AND KIRK CREEK



TYLIN INTERNATIONAL

**Project Objective:** Replace/rehabilitate the two culverts to meet current structural, hydraulic and geometric codes and standards.

**Proposed Alternative:** Replacement of both existing culverts

<u>Roadway Information:</u>	<u>Existing</u>	<u>Proposed</u>
<b>Travel Lane Width:</b>	11 ft	11 ft
<b>Shoulder Width:</b>	Varies	6 ft

<u>Structure Information:</u>	<u>Existing</u>	<u>Proposed</u>
<b>Round Pond Creek</b>		
<b>Year Constructed:</b>	1936	2021
<b>Type:</b>	Concrete Slab	Concrete - 3-Sided Structure
<b>Size:</b>	15-foot opening	15-foot opening
<b>Kirk Creek:</b>		
<b>Year Constructed:</b>	1933	2021
<b>Type:</b>	Concrete Slab	Concrete 3-Sided Structure
<b>Size:</b>	12-foot opening	12-foot opening

**Additional Right-of-way:** Some Temporary and Permanent Easements are anticipated

**Pedestrian Access:** Pedestrians will not be allowed in the work area during construction.

**Environmental Classification and Permits:** SEQRA Type II  
Joint NYSDEC/USACE Permit Application

**Maintenance of Traffic:** A local detour will be provided. See attached maps. These culverts will be constructed one at a time. Direct access to Old English Drive from English Road will be closed during construction of Kirk Creek Culvert.

**Anticipated Schedule:** Begin Construction: Spring 2021  
End Construction: Fall 2021

**Contact Person:** Henry Herdzik, PE  
(585) 753-7729 – voice  
[HHerdzik@monroecounty.gov](mailto:HHerdzik@monroecounty.gov) – email


LANDS N/F  
1700 ENGLISH ROAD LLC  
1700 ENGLISH RD.  
TMP# 59.01-3-56J1  
L. 11254, P. 482

LANDS N/F  
846 LPR LLC  
1680 ENGLISH RD.  
TMP# 59.01-3-56J4  
L. 10961, P. 284

LANDS N/F  
TOWN OF GREECE  
ENGLISH RD.  
TMP# 59.01-3-55  
L. 7896, P. 211

LANDS N/F  
ENGLISH PINES MANAGEMENT, LLC  
1687 ENGLISH RD.  
TMP# 59.01-6-8  
L. 11671, P. 393

LANDS N/F  
BRIAN JUSTICE  
1677 ENGLISH RD.  
TMP# 59.01-6-9  
L. 10381, P. 272

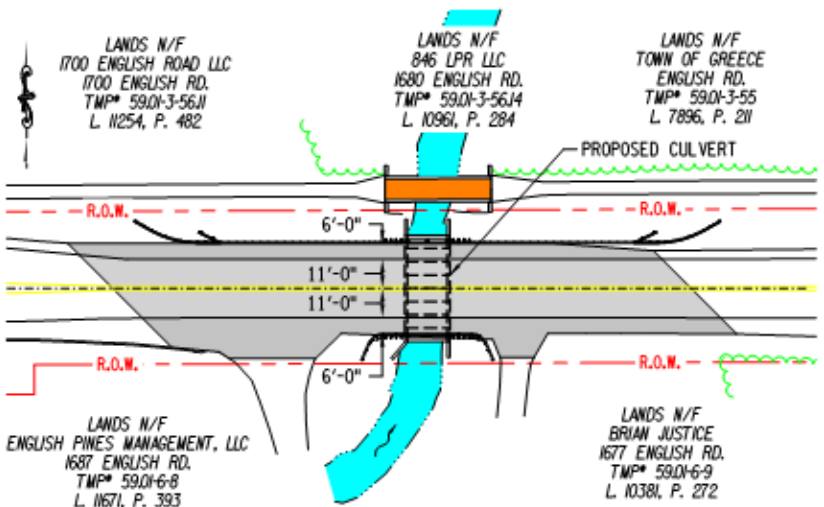


**ENGLISH ROAD CULVERT PLAN**  
600 FEET EAST OF LONG POND ROAD  
NOT TO SCALE

LANDS N/F  
JACK & AARON RITTER  
ENGLISH RD.  
TMP# 59.01-12  
L. 10034, P. 663

LANDS N/F  
JACK & AARON RITTER  
1300 ENGLISH RD.  
TMP# 59.01-13  
L. 10034, P. 666

LANDS N/F  
STEPHEN AND MARCY HORN  
11 OLD ENGLISH DR.  
TMP# 59.01-3-67  
L. 9165, P. 159

LANDS N/F  
LADD & CATHY DROWGOLD  
18 OLD ENGLISH DR.  
TMP# 59.01-3-68  
L. 6272, P. 265

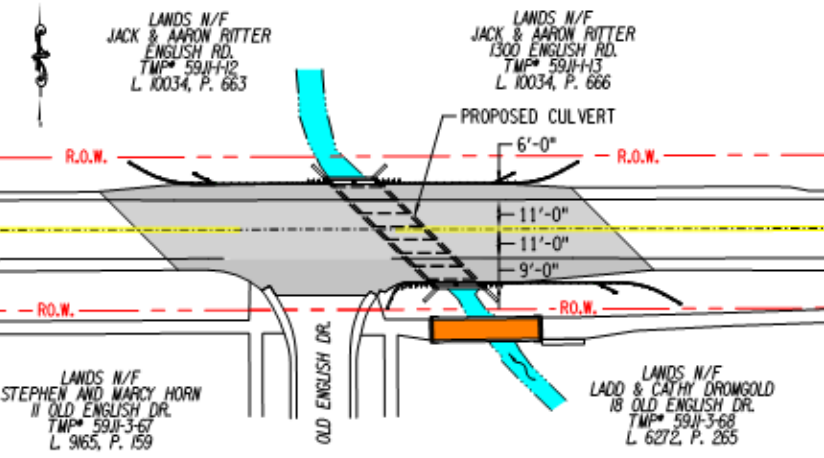

**ENGLISH ROAD CULVERT PLAN**  
AT OLD ENGLISH DRIVE  
NOT TO SCALE

