


MONROE COUNTY DEPARTMENT OF TRANSPORTATION

WELCOMES YOU TO A
PUBLIC INFORMATION MEETING

For

MOSCOW ROAD CULVERT REPLACEMENT AT YANTY CREEK TRIBUTARY

(FROM: 829 TO 874 MOSCOW ROAD)
TOWN OF HAMLIN

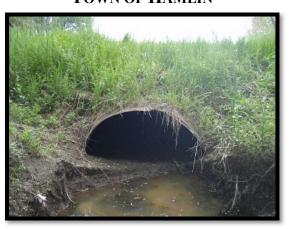

TUESDAY, JANUARY 28, 2020

This meeting is being held to allow interested parties to review the project plans in an informal setting, comment, and ask questions of the Monroe County Department of Transportation Officials and Consultant Design Staff. There will be a short presentation followed by a period for additional questions and comments.


The schedule for the meeting is as follows:
Short Presentation: 7:00 PM
Questions Immediately Following Presentation





Detour Route

Approximate Distance: 2.53 miles
Approximate Travel Time: 5 minutes

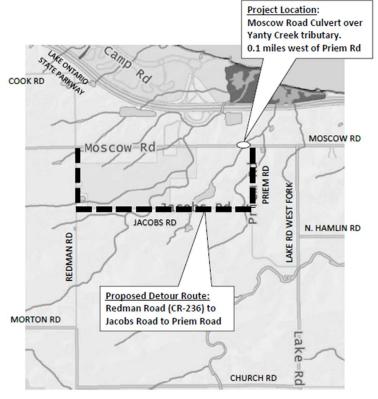



DETOUR MAP

MOSCOW ROAD CULVERT REPLACEMENT PROJECT S.I.N. 06-211-293 0.1 MILES WEST OF PRIEM ROAD **Project Location:** Moscow Road (County Road 211) over Yanty Creek

Tributary is 0.1 miles west of Priem Road.

Project Objective: The Monroe County Department of Transportation

would like to replace an existing 54"x30" corrugated metal arch culvert on Moscow Road with a new 48" diameter steel reinforced polyethylene pipe. The new culvert was selected to provide structural, hydraulic, and geometric improvements to meet current codes and standards, while being the most maintenance-free and cost-effective solution with

the greatest duration and longevity.

Roadway InformationExistingProposedTravel Lanes:10' Asphalt16' AsphaltNo. Lanes:22

No. Lanes: 2 2 Sidewalks: None None

Structure InformationExistingProposedMaterial:Corrugated MetalReinforced HDPE

Type: 54" x 30" Arch 48" Pipe **Length:** 37' 57'

General Information

Pedestrian Access: Pedestrians will not be allowed in the area during

construction.

Permitting Required: SEQRA Type II Action, Joint NYSDEC/USACOE Permit

Nationwide Permit #3 – Maintenance 401 Water Quality Certification

Traffic Maintenance: A detour will be used to direct traffic down Priem

Road, Jacobs Road, and Redman Road to travel

around the construction site.

Anticipated Schedule: Begin Construction: Summer, 2020

End Construction: Fall, 2020

Contact Person: David Kubiak 585.753.7731

DavidKubiak@monroecounty.gov