SEE PLANS AND TYPICAL
SECTIONS FOR RESTORATION

WIDTH VARIES TO
MATCH EXIST. (SEE
PLANS OR A.D.B.E.)

BACKFILL WITH
SUITABLE EXCAVATED
MATERIAL A.D.B.E.

BACKFILL WITH
SUITABLE EXCAVATED
MATERIAL A.D.B.E.

6"

6"

LIMITS
FOR ITEM
203.02

5" ITEM 608.0101

6" ITEM 304.12

SECTION C-C

NOT TO SCALE

PROPOSED
SIDEWALK
(SEE PLANS)

LENGTH VARIES
(SEE PLANS OR A.D.B.E.)

SAWCUT AT
NEAREST
JOINT OR
A.O.B.E.

C

CURB

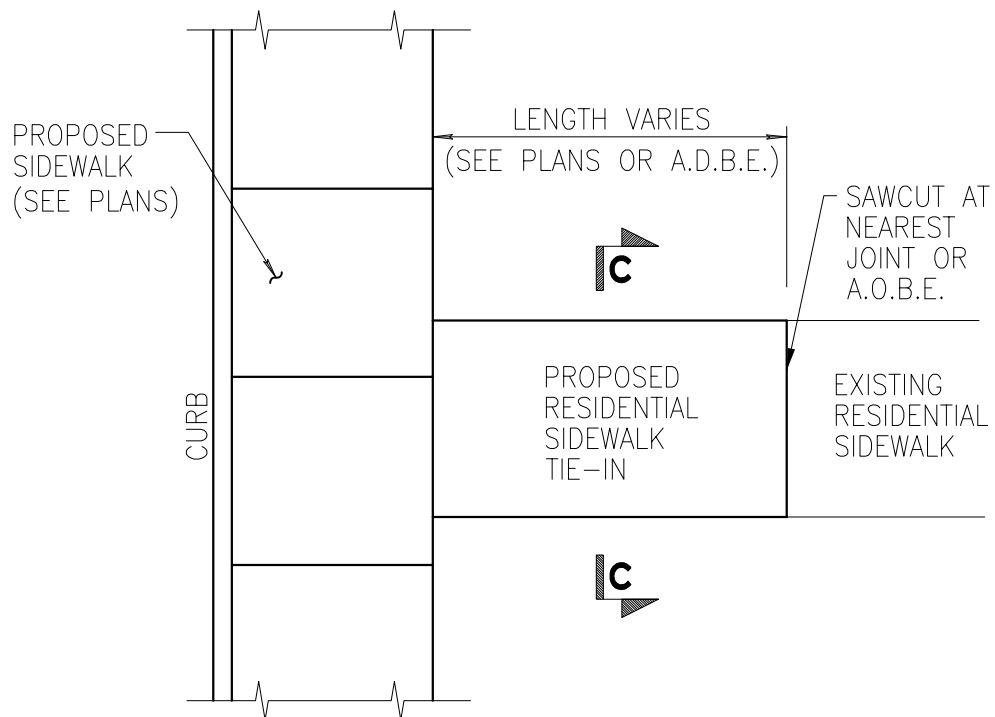PROPOSED
RESIDENTIAL
SIDEWALK
TIE-IN

EXISTING
RESIDENTIAL
SIDEWALK

C

SIDEWALK TIE-IN WITH RESIDENTIAL WALK

NOT TO SCALE - REVISED: 06/12/23